

KNX CO₂-, Humidity and Temperature sensor (surface mounted)

Operating Instructions



Art. no. MTN6005-0001

Designated Use

- The sensor serves to detect carbon dioxide (CO₂), relative humidity and temperature in a variety of rooms (offices, schools, meetingrooms etc).
- The CO₂ content of the air is a verifiable indicator of the air quality in the living area. The higher the CO₂ content, the poorer the air.
- The higher the CO₂ content, the poorer the air. The devices are suitable for use in a normal environment.

For your safety



DANGER

Risk of fatal injury due to electrical current

All work on the device should only be carried out by trained and skilled electricians. Observe the county-specific regulations.

- Do not use the sensor for safety related gas measurements!
- Only operate the sensor with extra-low voltage!
- Do not drop the sensor. Strong vibrations interfere with the accurate measurement of CO₂.

Characteristics


- The CO₂ gas makes up only approx. 0.034 % of our fresh air and acts as an indicator for assessing the air quality in a room.
- The concentration of 0.1 % (1000 ppm) is the limit value for indoor rooms.
- The maximum concentration in a workplace is 5000 ppm.
- Temperature detection range: 0–40 °C
- Setting range thresholds: 500–2550 ppm
- “Physical value” object: 0–9999 ppm
- “Relative humidity” detection range: 1 %–100 %
- There are 3 independent thresholds of the readings for CO₂ and relative humidity as well as a threshold for the temperature reading.
- Exceeding or under-running the thresholds triggers a response: Send priority. Switching, value.
- Every threshold has a disable object.

Installation

- Locate the sensor (for temperature measurement) on an internal wall, at about eye level.
- Avoid drafts or heat emission.
- Do not mount the sensor on a soft surface as this will inhibit air exchange.

Description and function

The sensor has 2 LEDs that indicate the current CO₂ content of the measured ambient air and the humidity.

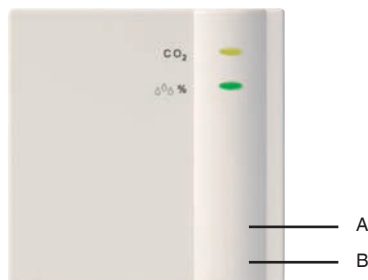


- A LED for indicating CO₂ content (from green → red)
 B LED for indicating relative humidity (from yellow → blue)

Thresholds of different readings

Reading	LED CO ₂	CO ₂ -concentration	LED relative humidity	Humidity status
below threshold 1	green	low	yellow	humidify
between threshold 1 and 2	yellow	average	green	humidity OK
between threshold 2 and 3	orange	high	red	dehumidify
above threshold 3	red	very high	blue	condensation alarm

Bus connection


- Open the housing cover with a screwdriver at the 4 side lugs and feed the bus line from below through the opening.
- Plug bus line into bus terminals. Ensure correct polarity.
- Close housing cover.

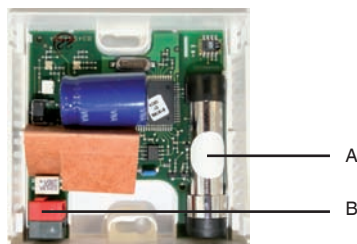

- A Don't touch the membrane by mounting the surface
 B Bus terminal and bus line

Programming physical address

- Press the program button (2) with a screwdriver through the openings at the bottom of the device.
- Programming LED (1) lights up. The sensor is in programming mode.



- Start-up, diagnostics and configuration are handled by ETS (KNX Tool Software).

Start-up

Please refer to the Product Handbook for detailed functional descriptions (also at www.schneider-electric.com).

Technical Data

Operating voltage:	Bus voltage
Current consumption KNX:	≤ 10 mA
Bus interface module (BCU):	integrated
Permissible ambient temperature:	–5 °C to +45 °C
Protection class:	III
Protection rating:	IP 20 in accordance with EN 60529
Equipment standard:	in accordance with EN 60730-1
Housing:	74 x 74 x 30,8 mm

Observe deviating technical data on the rating plate! Technical changes reserved. The devices comply with European Directives 2006/95/EEC (low-voltage directives) and 2004/108/EEC (EMC Directives).

If the devices are combined with others for use within a system, ensure that the system as a whole does not cause radio interference.

The ETS database can be found under www.schneider-electric.com. Please refer to the Handbook for detailed functional descriptions.

Schneider Electric Industries SAS

If you have technical questions, please contact the Customer Care Center in your country.

www.schneider-electric.com

This product must be installed, connected and used in compliance with prevailing standards and/or installation regulations. As standards, specifications and designs develop from time to time, always ask for confirmation of the information given in this publication.